



## Two Adjuster Kinematic Mounts

- Resolution: 5 m rad (0.3°) per Rev via Two Precision Adjusters
- Mounts Optics at Least 0.16" (4 mm) Thick
- Hardened Stainless Steel Inserts at Kinematic Contacts Reduce Wear

Capabilities:

- Mounts Mirrors From Ø1" to Ø3", all types of lenses, optical filters and many other types of optical components

Features:

- Nylon Tipped locking screw to secure the optics
- Heavy duty spring for an ultra stable design

- Three Counterbored M4 Through Holes Allow for Left- or Right-Handed Orientation



Mahfanavar is ready to meet your needs (especially in size) with customized offerings.

Part Number	Description	Material
MHK01	2 Adjuster Kinematic Optic Mount Ø1"	Black anodized aluminum
MHK02	2 Adjuster Kinematic Optic Mount Ø2"	Black anodized aluminum
MHK03	2 Adjuster Kinematic Optic Mount Ø3"	Black anodized aluminum

Optomechanics

Motion Control

Light Sources

Optical Systems



Optomechanics

Motion Control

Light Sources

Optical Systems

Specification of Two Adjuster Kinematic Mounts

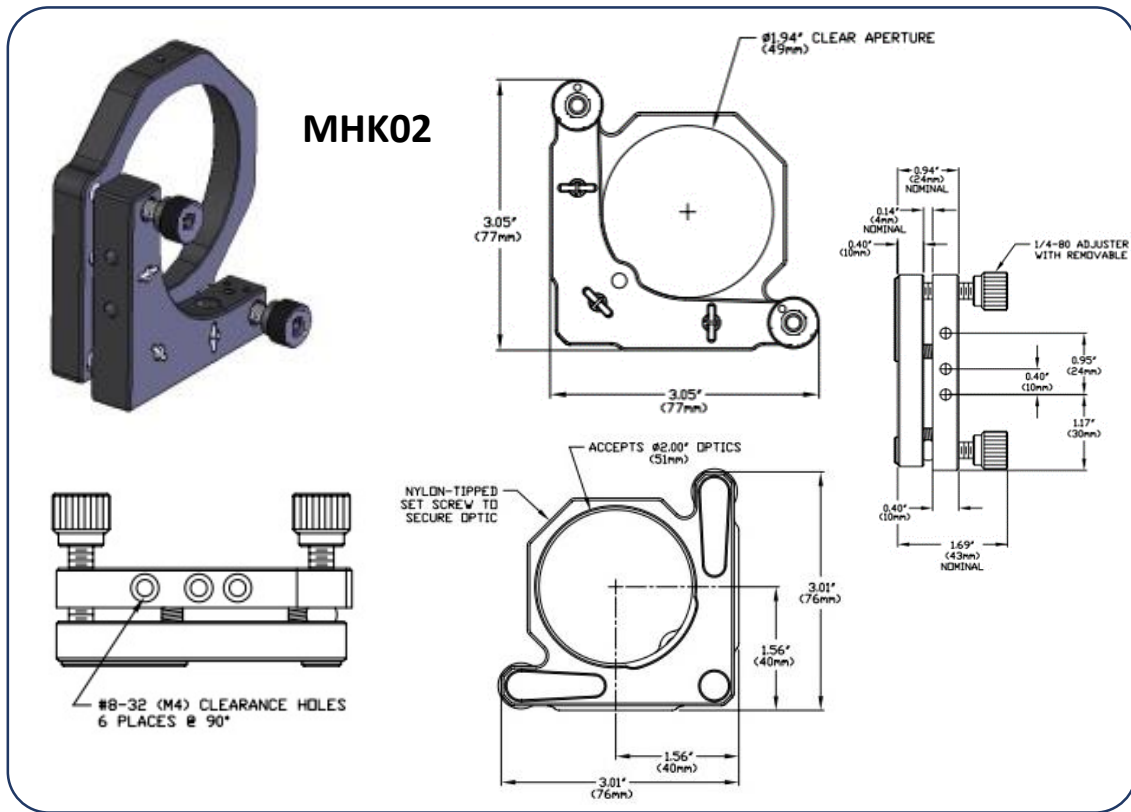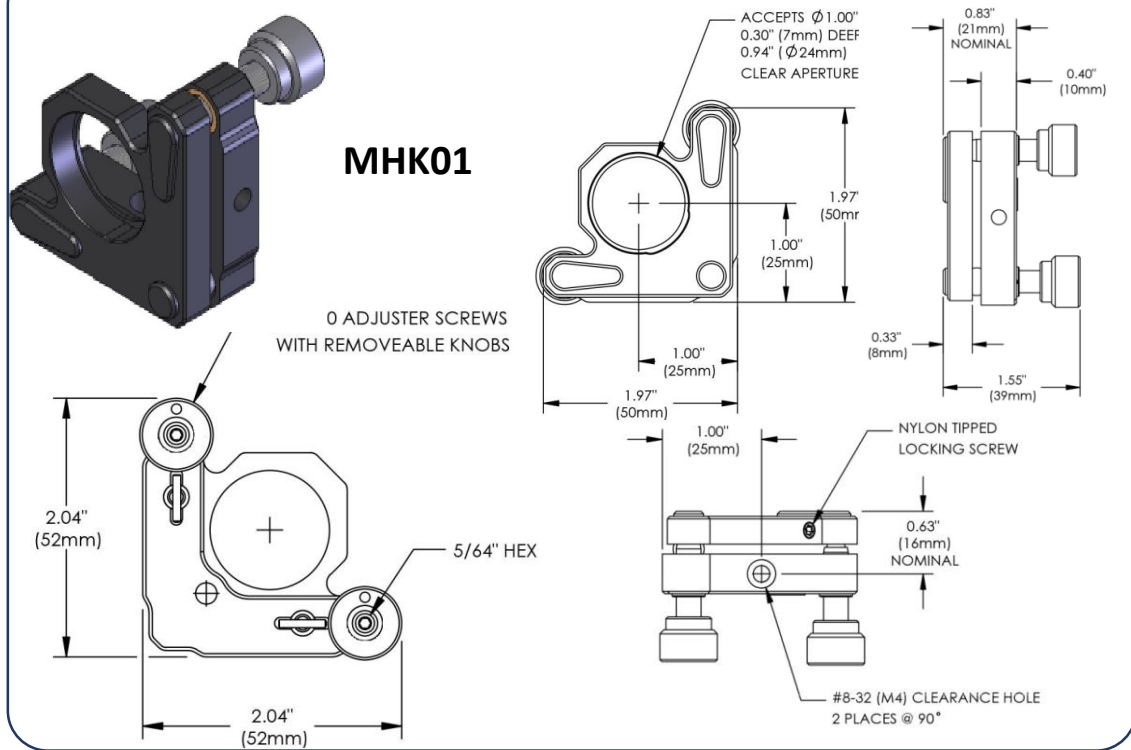

Part Number	Dimensional	weight
MHK01	20.6*49*49 mm	71 gr
MHK02	75*75*45 mm	140 gr
MHK03	97*97*56 mm	251 gr